





CACTUS FLOW PRODUCTS's Adjustable Choke assemblies and Long Nose Heater Choke assemblies are furnished with Alloy and or Harden Steel Stems and Seats as Standard Trim for Regular or Standard Service. Stainless Steel or Stainless Steel with Tungsten Carbide Trim Sets for Abrasive and or Sour Gas Service are available on request. Positive Choke assemblies are furnished *less flow bean*. Positive choke assemblies may be converted to Adjustable Choke assemblies by replacing the blanking cap assembly and flow bean with the appropriate adjustable bonnet assembly and seat.




CFP 29

Cactus Model	Inlet	Outlet	Working Pressure	Orifice Size	Dimensions		
					A	B	C
CFP 29	2" FLP	2" MLP	2,000	3/4" & 1"	2.38"	5.31"	16.31"
CFP O60	2" FLP	2" MLP	3,000	3/4" & 1"	2.50"	7.44"	22.50"
CFP O63	3" FLP	3" MLP	3,000	2"	4.25"	7.50"	25.00"

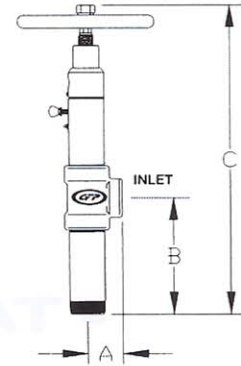


CFP O60

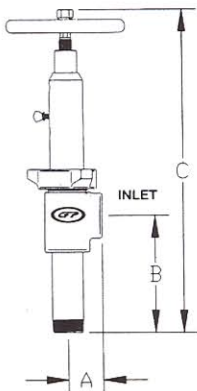


CFP N60

Cactus Model	Inlet	Outlet	Working Pressure	Orifice Size	Dimensions		
					A	B	C
CFP N60	2" FLP	2" MLP	5,000	3/4" & 1"	2.75"	9.00"	23.50"
CFP FT108	2" FLP	2" MLP	5,000	1" Max	2.75"	9.00"	13.00"




CFP FT108

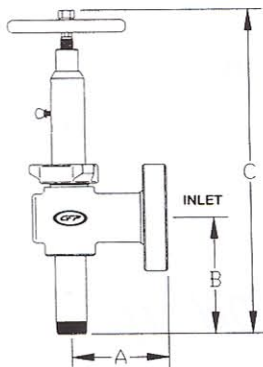

CFP FT116A

Cactus Model	Inlet	Outlet	Working Pressure	Orifice Size	Dimensions		
					A	B	C
CFP FT116A	2-1/16 5m	2" MLP	5,000	3/4" & 1"	6.63"	9.00"	23.50"
CFP FT116P	2-1/16 5m	2" MLP	5,000	1" Max	6.63"	9.00"	13.50"



CFP FT116P